

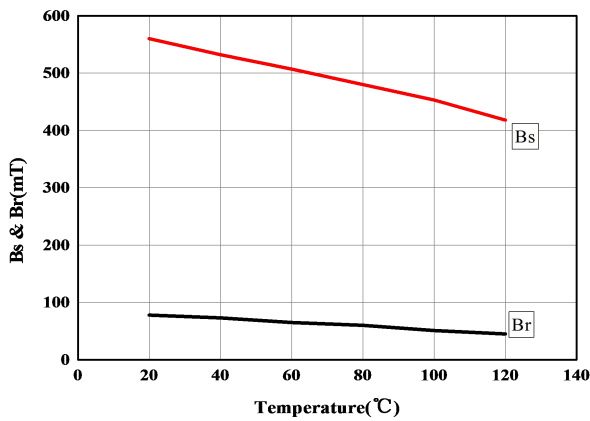
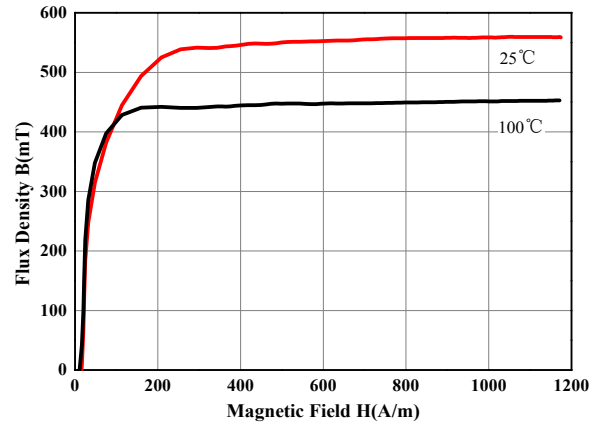
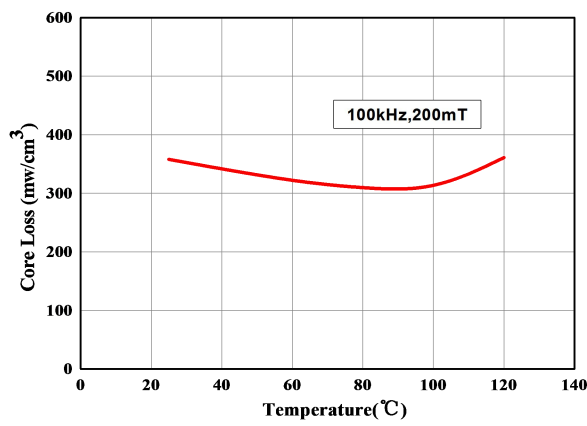


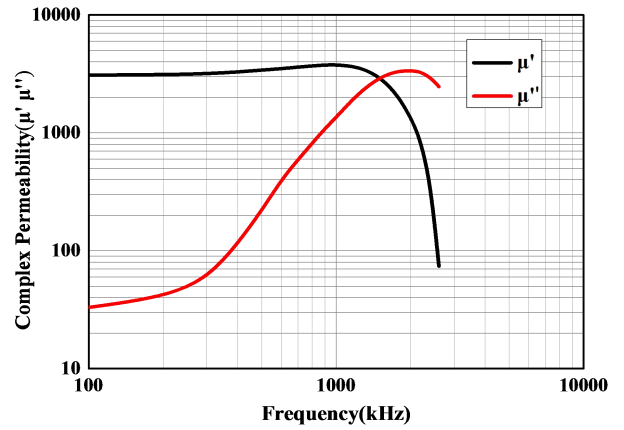

DMR95B 材料特性

DMR95B Material Characteristics

特性 SYMBOL	测试条件 CONDITIONS		典型值 VALUE
初始磁导率 μ_i Initial Permeability	f=10kHz,B<0.25mT	25℃	3300±25%
饱和磁感应强度 B_s (mT) Saturation Magnetic Flux Density	50Hz, 1194A/m	25℃	540
		100℃	450
剩磁 B_r (mT) Residual Magnetic Flux Density		25℃	75
		100℃	50
矫顽力 H_c (A/m) Coercive Force		25℃	10
		100℃	8
功耗 P_v (mW/cm ³) Power Loss	100kHz,200mT	25℃	350
		100℃	300
		120℃	360
居里温度 T_c (℃) Curie Temperature	f=10kHz,B<0.25mT		>230
密度 d (g/cm ³) Density		25℃	4.9

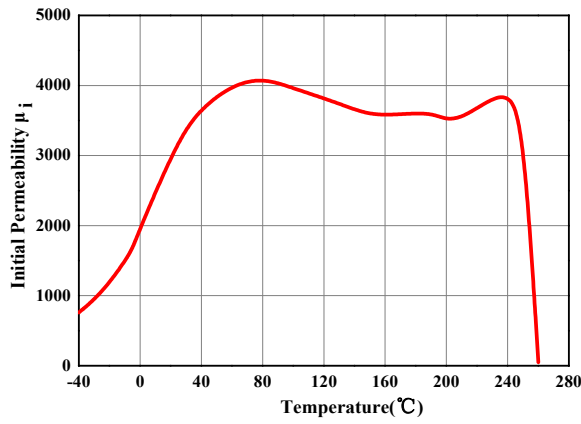

以上数据是根据标准样环 $\phi 25 \times \phi 15 \times 8$ 获得的典型数据，有关产品的具体性能会在此基础上有所调整。

The above typical data are calculated from the standard toroid core. Specific performance of the product will be adjusted on this basis