

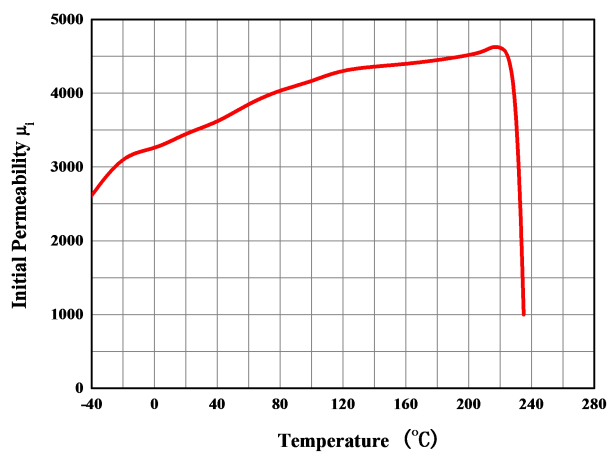
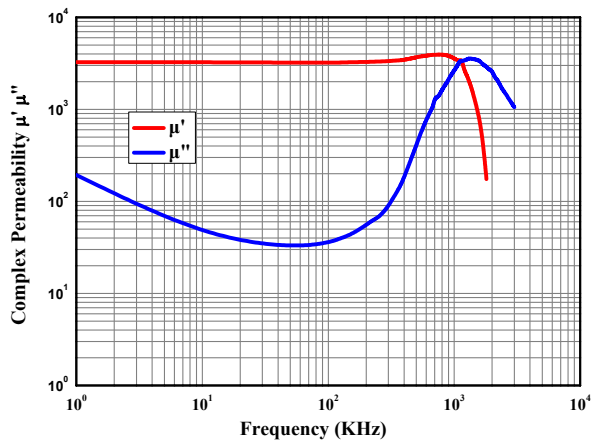
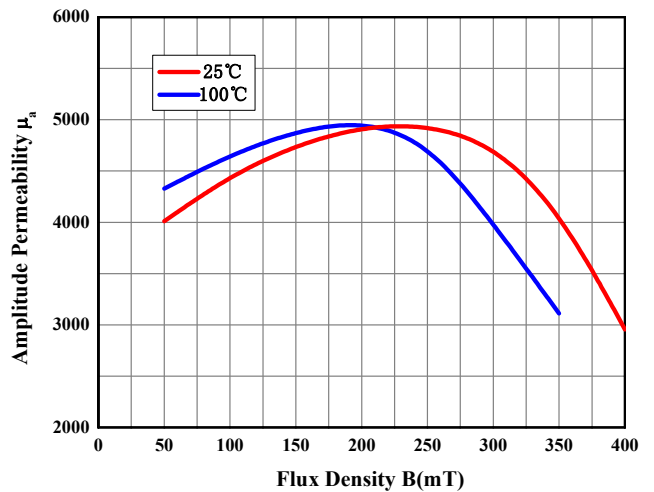
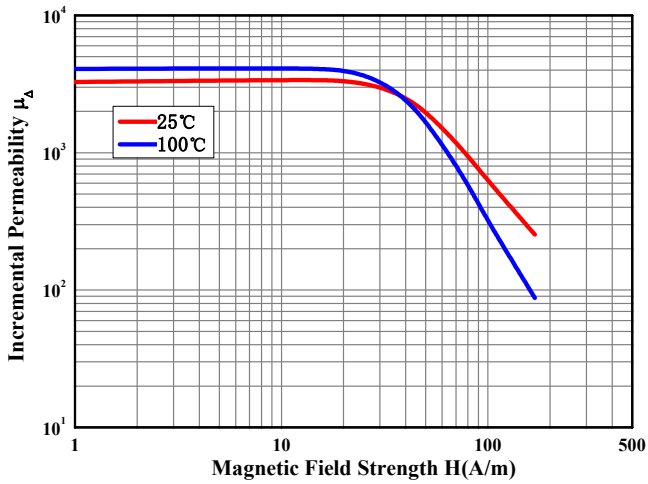
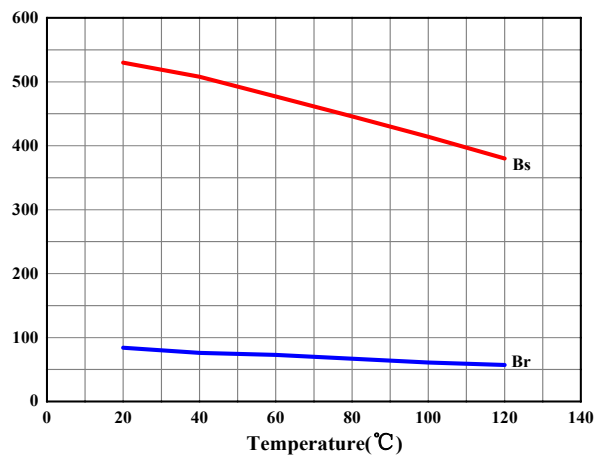
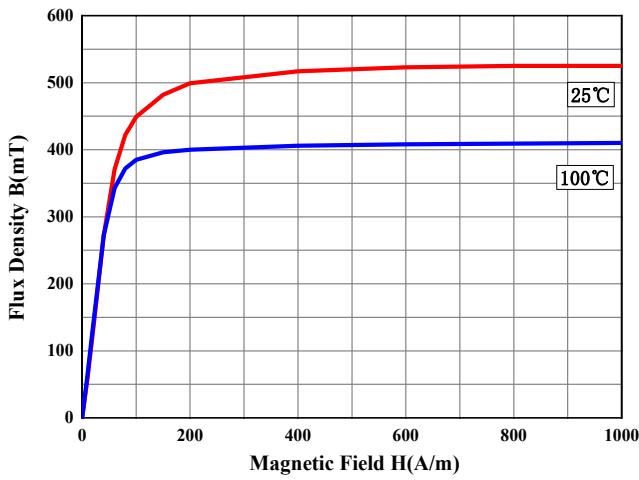


DMR95E 材料特性

DMR95E Material Characteristics

特性 CHARACTERISTICS	测试条件 CONDITIONS		典型值 VALUE
初始磁导率 μ_i Initial Permeability	f=10kHz, B<0.25mT	25℃	3300±25%
饱和磁感应强度 Bs (mT) Saturation Magnetic Flux Density	50Hz, 1194A/m	25℃	530
		100℃	410
25℃		80	
100℃		50	
25℃		9	
100℃		9	
剩磁 Br(mT) Residual Magnetic Flux Density	100kHz, 200mT	25℃	320
功耗 Pv(mW/cm ³) Power loss		100℃	290
		120℃	340
居里温度 Tc (℃) Curie Temperature	f=10kHz, B<0.25mT		>215
密度 d(g/cm ³) Density		25℃	4.9

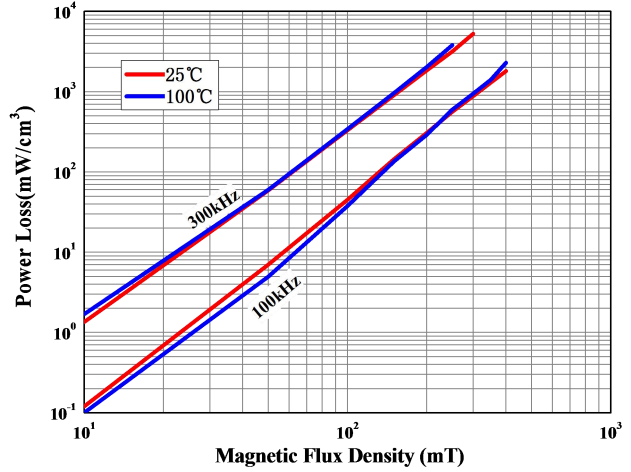

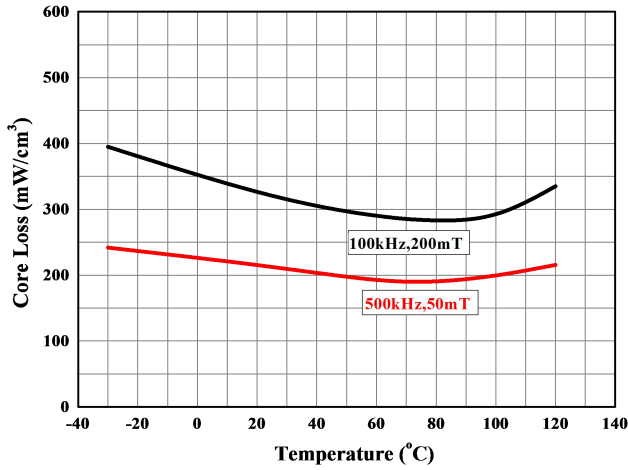

以上数据是根据标准样环 $\phi 25 \times \phi 15 \times 8$ 获得的典型数据，有关产品的具体性能会在此基础上有所调整。

The above typical data are calculated from the standard toroid core. Specific performance of the product will be adjusted on this basis.