








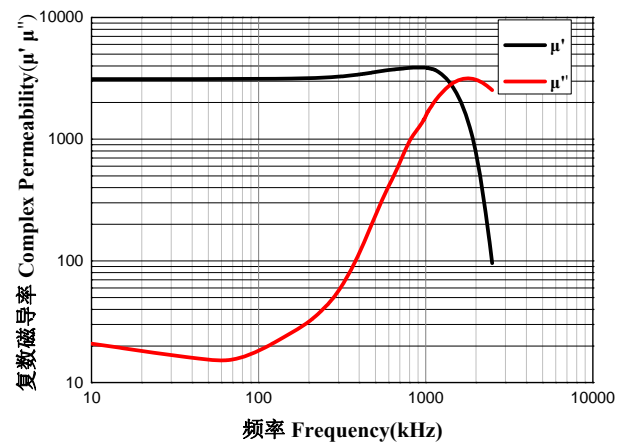


DMR95H 材料特性

DMR95H Material Characteristics

特性 SYMBOL	测试条件 CONDITIONS		典型值 VALUE
初始磁导率 μ_i Initial Permeability	f=10kHz, B<0.25mT	25 °C	3000±25%
饱和磁感应强度 B_s (mT) Saturation Magnetic Flux Density	50Hz, 1194A/m	25 °C	530
		100 °C	430
25 °C		85	
100 °C		60	
矫顽力 H_c (A/m) Coercive Force		25 °C	9
		100 °C	7
功耗 P_v (mW/cm ³) Power loss	100kHz, 200mT	25 °C	370
		100 °C	330
	500kHz, 50mT	25 °C	220
		100 °C	210
居里温度 T_c (°C) Curie Temperature	f=10kHz, B<0.25mT		>220
密度 d(g/cm ³) Density		25 °C	4.9

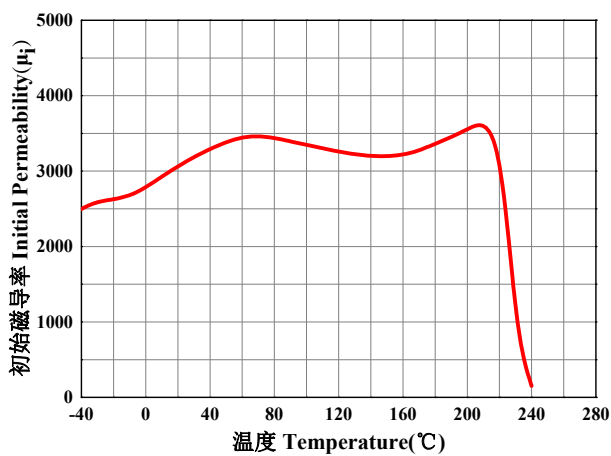

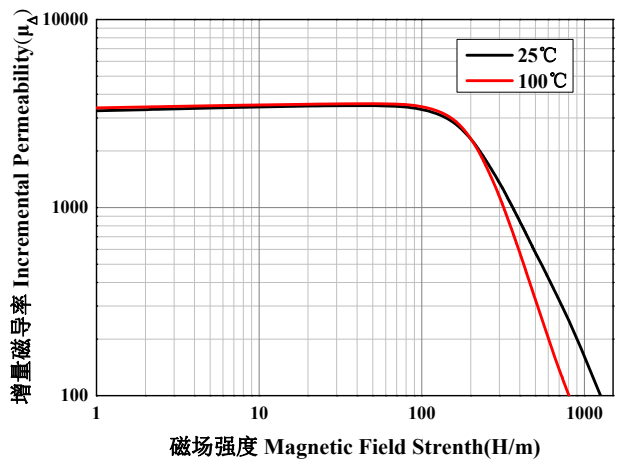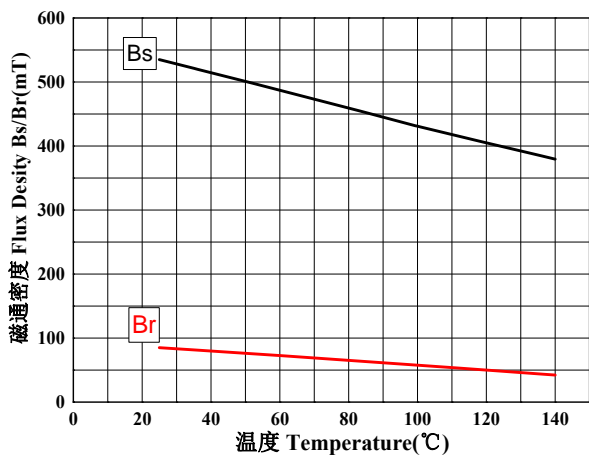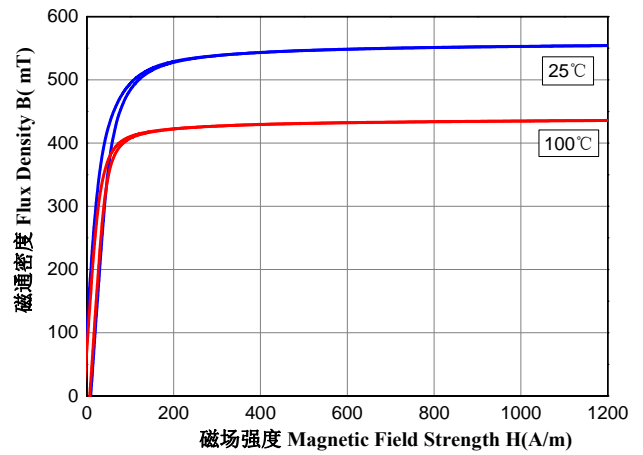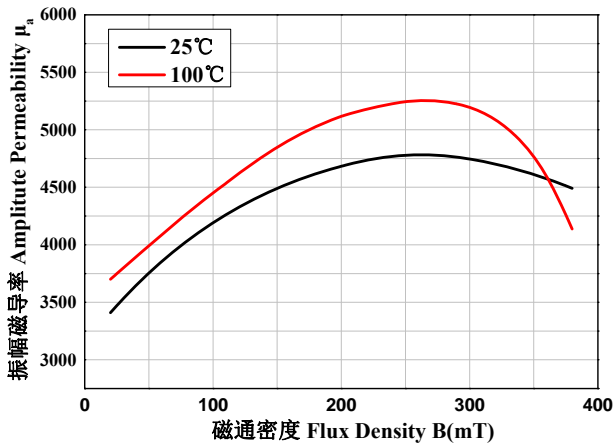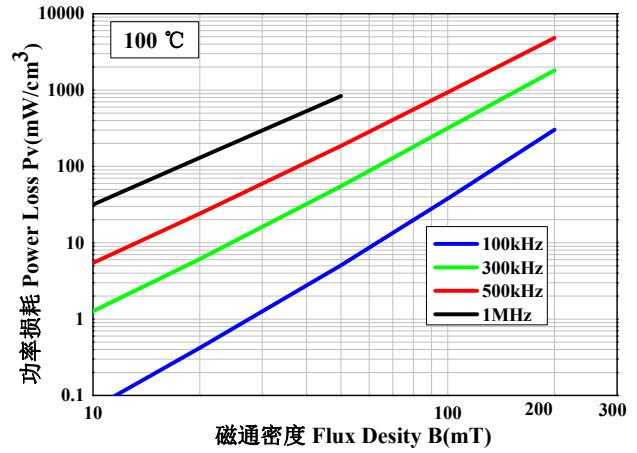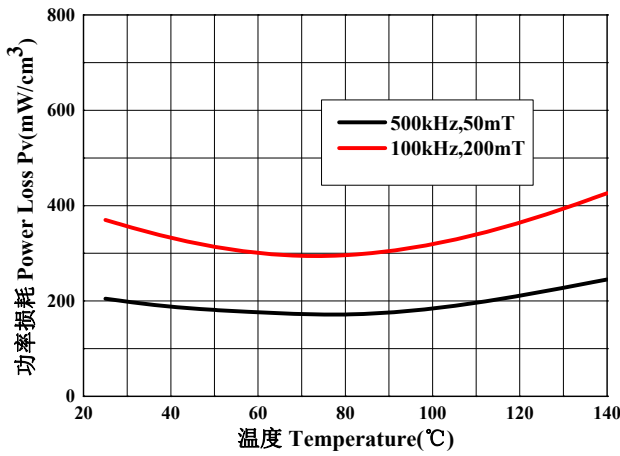

以上数据是根据标准样环 $\phi 25 \times \phi 15 \times 8$ 获得的典型数据，有关产品的具体性能会在此基础上有所调整。

The above typical data are calculated from the standard toroid core. Specific performance of the product will be adjusted on this basis.