

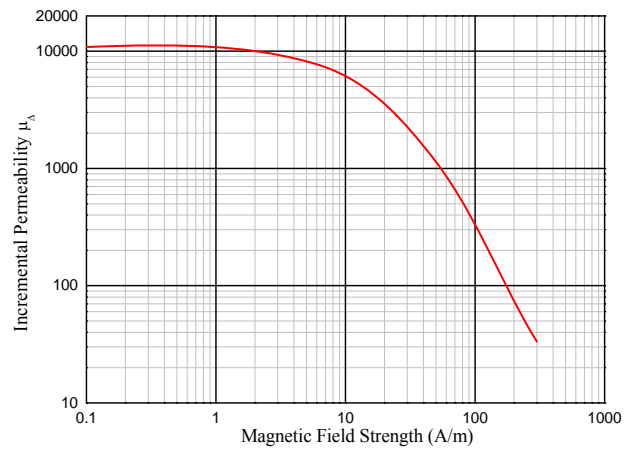
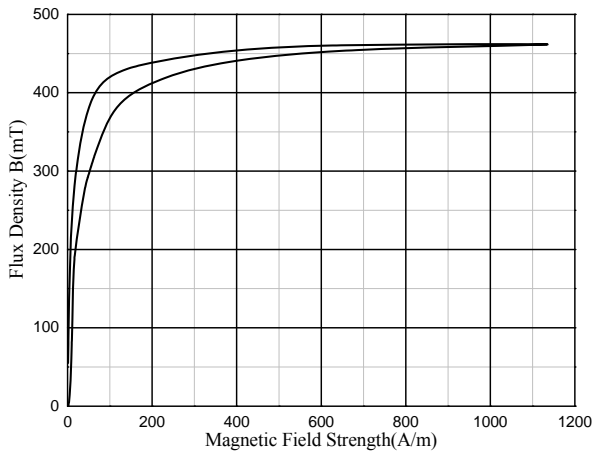


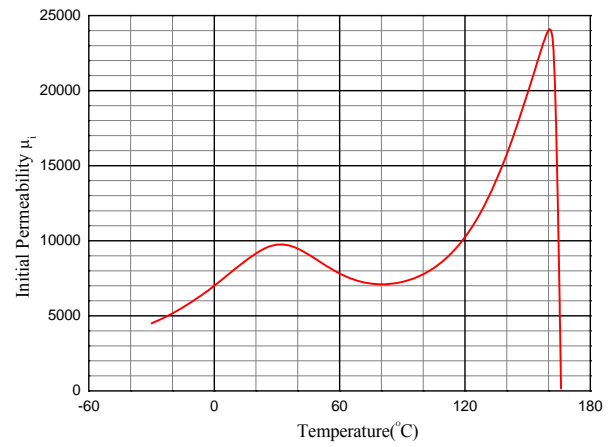

R10KC 材料特性

R10KC Material Characteristics

特性 SYMBOL	测试条件 CONDITIONS		典型值 VALUE
初始磁导率 μ_i Initial permeability	10kHz, B<0.25mT	25°C	10000 ± 30%
比损耗因子 $\tan\delta/\mu_i$ Relative loss factor	100kHz, B<0.25mT	25°C	<7.0 × 10 ⁻⁶
饱和磁通密度 B_s (mT) Saturation flux density	50Hz, 1194A/m	25°C	>450
剩磁 B_r (mT) Residual flux density		25°C	<80
矫顽力 H_c (A/m) Coercivity force		25°C	<10
居里温度 T_c (°C) Curie temperature			>150
密度 d (g/cm ³) Density			4.85

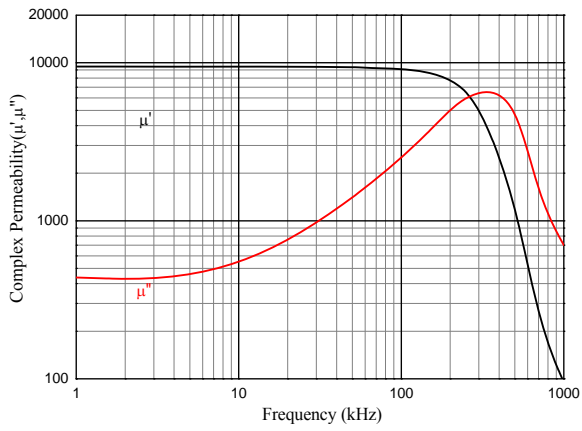

以上数据是根据标准样环 $\phi 25 \times \phi 15 \times 8$ 获得的典型数据，有关产品的具体性能会在此基础上有所调整。

The above typical data are calculated from the standard toroid core. Specific performance of the product will be adjusted on this basis