

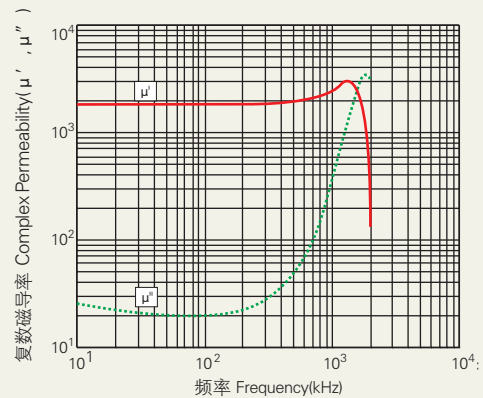
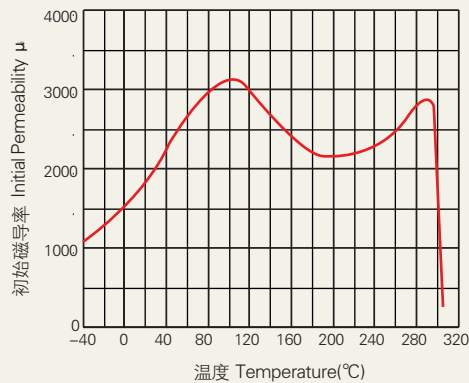
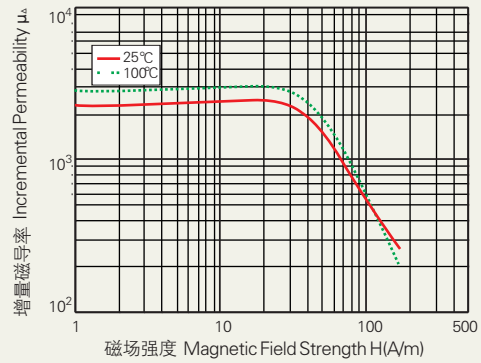
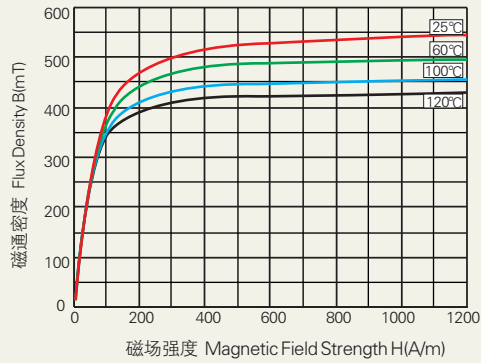
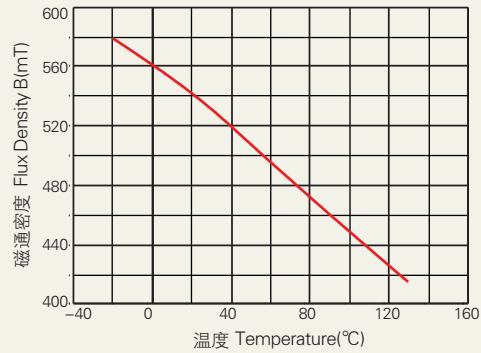
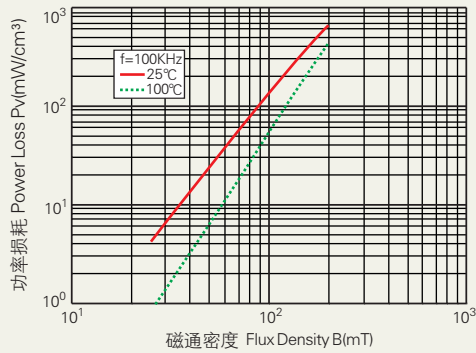


DMR24材料特性 · DMR24 Material Characteristics

特性 SYMBOL	测试条件 CONDITIONS		典型值 VALUE
初始磁导率 μ_i Initial permeability	10kHz, B<0.25mT	25°C	2000 ± 25%
饱和磁通密度 B_s (mT) Saturation Flux Density	50Hz, 1194A/m	25°C	540
剩磁 B_r (mT) Residual Magnetic Flux Density		100°C	460
矫顽力 H_c (A/m) Coercive Force		25°C	180
		100°C	65
功耗 P_v (mW/cm ³) Power loss	100kHz, 200mT	25°C	13
		100°C	11
	500kHz, 50mT	25°C	750
		100°C	445
居里温度 T_c (°C) Curie temperature	10kHz, B<0.25mT	25°C	260
		100°C	140
电阻率 ρ ($\Omega \cdot m$) Resistivity		25°C	8
密度 d (g/cm ³) Density		25°C	4.9

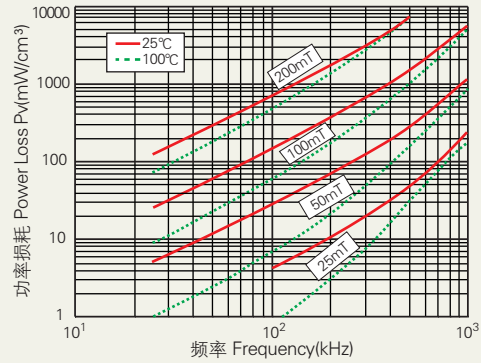

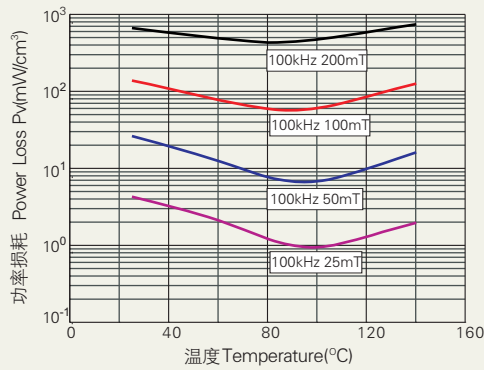

以上数据是根据标准样环 $\phi 25 \times \phi 15 \times 8$ 获得的典型数据，有关产品的具体性能会在此基础上有所调整。
The above typical data are calculated from the standard toroid core. Specific performance of the product will be adjusted on this basis.