
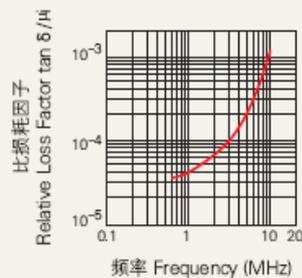
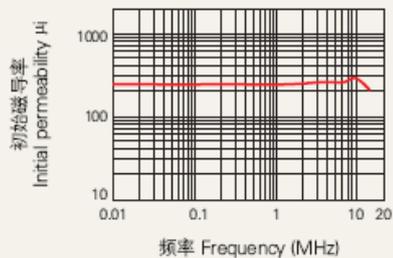
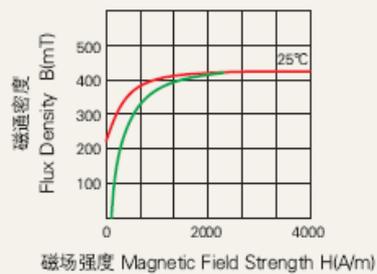


# DN25H材料特性 DN25H Material Characteristics

| 项目<br>Item                                 | 符号<br>Symbol          | 测试条件<br>Condition | 标称值<br>Value     | 单位<br>Unit                                     |
|--|-----------------------|-------------------|------------------|--|
| 初始磁导率<br>Initial Permeability              | $\mu_i$               |                   | 250 ± 25%        |  |
| 工作频率<br>Working Frequency                  | f                     | 25°C              | 0.1-2            | MHz  |
| 比损耗因子<br>Relative Loss Factor              | $\tan \delta / \mu_i$ | 25°C              | 60<br>1MHz       | $\times 10^{-6}$                               |
| 饱和磁通密度<br>Saturation Magnetic Flux Density | Bs                    | 25°C              | 410<br>4000A/m   | mT   |
| 剩磁<br>Remanence                            | Br                    | 25°C              | 230              | mT   |
| 矫顽力<br>Coercive Force                      | Hc                    | 25°C              | 75               | A/m  |
| 比温度系数<br>Relative Temperature Coefficient  | $a \mu_r$             |                   | 10-25            | $\times 10^{-6}/^\circ\text{C}$<br>20°C ~ 60°C |
| 居里温度<br>Curie Temperature                  | Tc                    |                   | >230             | °C   |
| 电阻率<br>Electrical Resistivity              | $\rho$                | 25°C              | >10 <sup>5</sup> | $\Omega \cdot \text{m}$                        |
| 密度<br>Density                              | d                     | 25°C              | 5.1              | g/cm <sup>3</sup>                              |

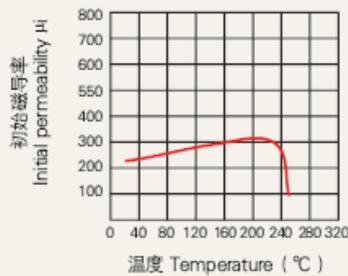

注：以上数据是根据标准样环  $\varnothing 25 \times \varnothing 15 \times 8$  获得的典型数据，有关产品的具体性能会在此基础上有所调整。

The above typical data are calculated from the standard toroid core. The specific property of any parts will be adjusted a little based on these data.